BEONTAG CRUISER WINDSHIELD







Electrical specifications

Device type

UHF RFID / EPCglobal Gen2v2

Operational frequency

Global 865-928MHz

IC type

Impinj M780™

Memory configuration

EPC 496 bit; User 128 bit; TID 96 bit

EPC Memory content

Unique random 96bit EPC in every label


Read range (2W ERP)*

ETSI: up to 14m/46ft FCC: up to 12m/39ft

Applicable surface materials

Glass

*Read ranges are theoretical values that are calculated for non-reflective environment. Different surface materials may influence performance.

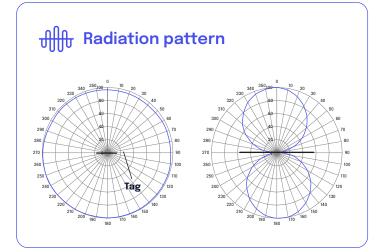



Description

Non-transferable tamper-evident label for car windshields.



Mechanical specifications

Tag materials

- Back side (towards windshield): PET with strong adhesion on glass.
- Front side (towards driver): Inkjet and thermal transfer printable PET. Resin ribbon recommended.

Weight

1 g

Delivery format

1500 pcs on reel, perforation between labels


Pitch on reel

33,866 mm / 1,333"

Reel core inner diameter 76 mm / 3"

Tag dimensions

92 x 26 x 0,2 mm / 3.62 x 1.02 x 0.01 in

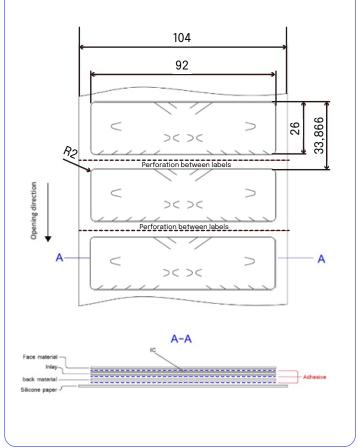

Product Datasheet BEONTAG CRUISER WINDSHIELD





Personalization options

Pre-encoding

Customer-specific encoding of EPC or user memory. Locking permanently or with password.

Customized dual-sided full color artwork Layout can include any static artwork.

Customer-specific visual printing

Variable data like barcodes, human readable text, serial number etc. printed on the driver side of the label.



Environmental resistance

Operating temperature

-35°C to +85°C / -31°F to +185°F

Ambient temperature

-35°C to +85°C / -31°F to +185°F

Storage condition

1 year in +20°C / 50% RH (shelf life for adhesive)


Expected lifetime

Years in normal operating conditions

Values in the table are the best recommendations; resistance against environmental conditions depends on the combination of all influencing factors, exposure duration and chemical concentrations. Thus, product's final suitability for certain environmental conditions is recommended to be tested. Contact Beontag for more specific information.



Installation instructions



Ideal installation conditions are +20°C (+68°F) / 50% RH. For exceptional conditions, please contact Beontag. Adhesive of the label will provide best adhesion in 24 hours after the installation. Bond strength can be improved with firm application pressure. Always clean and dry the surface for obtaining the maximum bond strength. Avoid touching the background adhesive. Label antenna parts should not be in contact with metal to enable best performance of the label. Note that metallized UV-protection films have strong effect on RFID performance.

Minimum bending diameter of the Beontag Cruiser Windshield is defined to be 50mm. Do not bend the label below the limit. Never touch on the location of the IC. IC chip is sensitive electrical component and can be damaged if unexpected pressure is applied on the chip.



Order informations

Product number: 3004076

Product Name: Beontag Cruiser Windshield M780

For other versions, additional information and technical support please contact Beontag.

V. 1.5 - UPDATED MAR 25

Product Datasheet BEONTAG CRUISER WINDSHIELD



DISCLAIMER

THE MATERIALS, PRODUCTS AND SERVICES ARE SOLD SUBJECT TO ITS STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, BEONTAG AND ITS AFFILIATES MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (I) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN BEONTAG STANDARD CONDITIONS OF SALE, BEONTAG AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Beontag products, materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished systems incorporating Beontag products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Beontag.

About Beontag

From the science of graphic and label materials, RFID and wireless IoT enablers, we create solutions across the value chain to deliver digital transformation for businesses around the world.

Sustainability is at the core of what we do and we strongly believe that by substituting non-renewable materials and innovating through more sustainable and renewable products, we act as an ESG enabler for our customers' value chain.

Beontag is one of the world's leading providers of RFID and wireless IoT solutions, being present in more than 40 countries with 7 R&D centers and 2,000 employees, in constant development of technological and sustainable solutions designed to connect items, and gain efficiency and end-to-end traceability

CONTACT US FOR MORE INFORMATIONS: **beontag.com**

The performance of the product should always be tested in the actual application conditions. Our recommendations are based on our most current knowledge and experience and the pictures and illustrations presented in this document are for illustration purposes only. As our products are used in conditions beyond our control, we cannot assume any liability for damage caused through their use. Beontag reserves the right to change its products and services at any time without notice.









