



# TEX 70x15



## Technical Specifications

- **RF protocol** EPC global Class 1 Gen 2; ISO18000-63
- **Frequency** 860-960 MHz (Global)
- **NXP**
- **IC type (chip)**<sup>1</sup> NXP UCODE 9xe
- **Chip memory**<sup>2</sup> 128 bits EPC; 96 bits TID
- **Write cycles** 100,000 times
- **Data retention** 20 years
- **Read range fixed**<sup>3</sup> Up to 29.53 ft (9 m)
- **Read range handheld**<sup>3</sup> Up to 23.62 ft (7.20 m)
- **Impinj**
- **IC type (chip)**<sup>1</sup> Impinj M830
- **Chip memory**<sup>2</sup> 128 bits EPC; 96 bits TID
- **Write cycles** 10,000 times
- **Data retention** 10 years
- **Read range fixed**<sup>3</sup> Up to 32.81 ft (10 m)
- **Read range handheld**<sup>3</sup> Up to 26.25 ft (8 m)
- **Polarization** Linear

## Key Features

- + **Textile:** flexible and washable
- + **200+:** commercial washing cycles
- + **EECC certified:** quality assurance
- + **10m:** long read range
- + **Cost-effective:** for high volume
- + **Printable:** texts, patterns and barcodes

## Applications

- **Medical scrubs**
- **Hospital linens**
- **Hotel linens**
- **Uniforms**
- **Rental costumes**

## Environmental Specifications

### Temperatures

- Operational -40°C to +85°C  
-40°F to +185°F
- Washing: 90°C (194°F), 15 minutes
- Pre-drying: 180°C (356°F), 30 minutes
- Ironing: 185°C (365°F), 10 seconds
- Heat-sealing: 210°C (410°F), 20 seconds
- Sterilization process: 135°C (275°F), 20 minutes

### Chemicals<sup>4</sup>

- Standard detergents, fabric softeners, bleach, oxygen/chlorine compounds, alkali substances, acetic and peracetic acid

- **Storage humidity** 8% - 95% RH
- **Mechanical resistance** 60 bars

- **Vibration** MIL-STD-810G
- **Warranty** 200 washing cycles or 3 years

<sup>1</sup> The chip data retention is based on the chip operating under general environment conditions.


<sup>2</sup> EPC can be re-programmed, password protected, or permanently locked. TID is locked and unique at the point of manufacturing.

<sup>3</sup> Off metal, actual read range may vary based upon use case and antenna power.

<sup>4</sup> The chemical resistance is based on the concentration of solutions and application environment. Please contact Xerafy for further details on chemical resistance.

## Physical Specifications

- **Material** Textile
- **Dimensions (in)**<sup>1</sup> 2.76 x 0.59
- **Dimensions (mm)**<sup>1</sup> 70 x 15
- **Thickness (in)**<sup>1</sup> 0.03 in,  
0.04 in on chip location, sew  
0.06 in on chip location, heat-seal
- **Thickness (mm)**<sup>1</sup>  
0.70 mm, 1 mm on chip location, sew  
0.60 mm, 1.50mm on chip location,  
heat-seal
- **Color** White
- **Weight** 0.40 g
- **Washing method** Laundry, dry cleaning

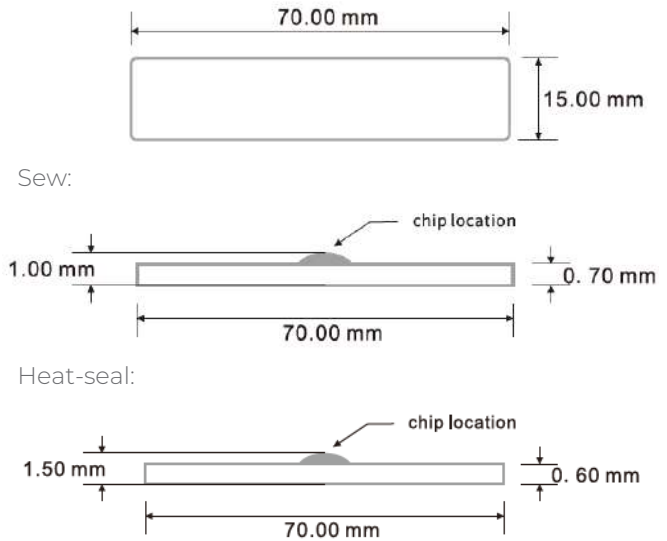

## Mounting Systems

Sew or heat-seal based on specific requirements, with different product P/N selections

## Installation Instructions

1. Install the tag by sewing:  
Sew into a hem or inside a pocket of fabric
2. Install the tag by heat-sealing:  
Seal the tag onto the textile at 210°C and 0.6-0.8 MPa for 20 seconds

<sup>1</sup> Tolerance: +/- 0.02; +/- 0.50

<sup>2</sup> Tolerance: H: +/- 0.004; H: +/- 0.100

## Industry Compliance



## Order Information

NXP	
TEX 70x15 (Sew): X7015-GL010-U9xe	TEX 70x15 (Heat-seal): X7015-GL011-U9xe
Impinj	
TEX 70x15 (Sew): X7015-GL010-M830	TEX 70x15 (Heat-seal): X7015-GL011-M830

## Customization Options

Encoding	Laser Marking <sup>1</sup>
----------	----------------------------

<sup>1</sup> Since the barcode reading rate isn't 100% reliable, we do not recommend laser engraving barcodes on the heat-seal version. Please select the sew version instead.

The information provided by Xerafy Singapore Pte. Ltd. is for general information purposes only. All information on the datasheet is provided in good faith. However we make no representation or warranty of any kind, express or implied, regarding the accuracy, adequacy, validity, reliability, availability, or completeness of any information on the datasheet.

Under no circumstance shall we have any liability to you for any loss or damage of any kind incurred as a result of the use of the product or reliance on any information provided on the datasheet. Your use of the product and your reliance on any information on the datasheet is solely at your own risk.

